




PRODUCT FEATURES

- AHRI 880 certified / ETL listed as applicable.
- 22 gauge zinc-coated steel, low leakage casing construction sealed to limit leakage to <1% of max rated flow at 3" w.g. static pressure.
- Optional:
 - 20 gauge construction Ultra Lo-Leak construction
- 1/2" dual density insulation (NFPA 90A, UL 181).
- Optional:
 - 1" dual density glass fiber insulation
 - 1/2" 1" foil faced glass fiber insulation – metal taped edges (ASTM C665)
 - 1" Fibre-Lok insulating system – foil faced insulation with steel encapsulated edges (ASTM C665)
 - Double wall construction (1/2" insulation is standard)
 - Lo-Temp casing construction
 - 3/8" fiber free closed cell foam insulation (NFPA255, UL181)
 - No insulation
- 90° inlet damper with leak resistant perimeter seal limiting leakage to <1% of max rated flow at 3" w.g. inlet static pressure. (Size 24x16 is Nominal 60° rotation).
- Multi-Point center averaging Velocity Wing air flow sensor for accuracy to ± 5% of design flow. Flow taps for air flow measurement provided with factory mounted controls.
- Slip & drive cleat discharge connection.
- Choice of right hand or left hand control position.
- Optional Accessories:
 - 6 x 6 access plate Bottom Side*
 - 6 x 6 access door Bottom Side* Hinged Double Camlock
 - Unit mounting brackets (field installed)
 - Std. Control enclosure Screw attached cover Hinged front cover
 - Large control enclosure Screw attached cover
- Control System Electronic Analog Digital Pneumatic Electric None – No controls
- Control Package _____ Field Installed Controls

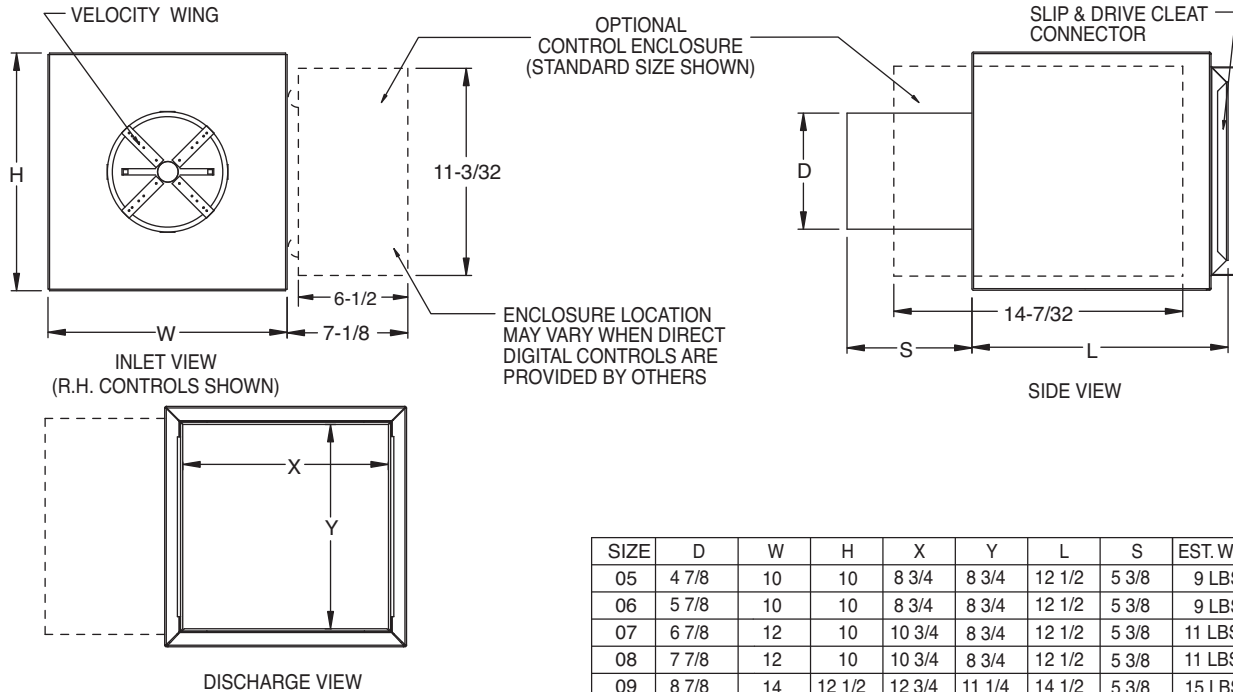

SIZE	D	W	H	X	Y	L	S	EST. WT.
05	4 7/8	10	10	8 3/4	8 3/4	12 1/2	5 3/8	9 LBS
06	5 7/8	10	10	8 3/4	8 3/4	12 1/2	5 3/8	9 LBS
07	6 7/8	12	10	10 3/4	8 3/4	12 1/2	5 3/8	11 LBS
08	7 7/8	12	10	10 3/4	8 3/4	12 1/2	5 3/8	11 LBS
09	8 7/8	14	12 1/2	12 3/4	11 1/4	14 1/2	5 3/8	15 LBS
10	9 7/8	14	12 1/2	12 3/4	11 1/4	14 1/2	5 3/8	15 LBS
12	11 7/8	16	15	14 3/4	13 3/4	18 1/2	5 3/8	19 LBS
14	13 7/8	20	17 1/2	18 3/4	16 1/4	18 1/2	5 3/8	23 LBS
16	15 7/8	24	17 1/2	22 3/4	16 1/4	18 1/2	5 3/8	28 LBS
24 x 16	24 x 16	38	18	38	18	30	5 7/16	79 LBS

NOTES:

- 24 X 16 NOT ILLUSTRATED.
- INLET SENSOR LINE TERMINATIONS ARE 3/8" O.D. WHEN CONTROLS ARE FIELD INSTALLED.
- * SIDE ACCESS DOOR IS LOCATED OPPOSITE CONTROL SIDE.



All dimensions are in inches.

JOB NAME:

SUBMITTED BY: