Anemostat®
AIR DISTRIBUTION

SUBMITTAL SHEET

www.anemostat-hvac.com

Model **EZTA**

SINGLE DUCT AIR TERMINAL
WITH INTEGRAL SOUND ATTENUATOR

PRODUCT FEATURES

- AHRI 880 certified / ETL listed as applicable.
- Integral sound attenuator reduces discharge sound levels.
- 22 gauge zinc-coated steel, low leakage casing construction sealed to limit leakage to <1% of max rated flow at 3" w.g. static pressure.
  Optional:
  ☐ 20 gauge construction ☐ Ultra Lo-Leak construction
- 1/2" dual density insulation (NFPA 90A, UL 181).
  Optional:
  ☐ 1" dual density glass fiber insulation
  ☐ 1/2" ☐ 1" foil faced glass fiber insulation – metal taped edges (ASTM C665)
  ☐ 1" Fibre-Lok insulating system – foil faced insulation with steel encapsulated edges (ASTM C665)
  ☐ Double wall construction (1/2" insulation is standard)
  ☐ Lo-Temp casing construction
  ☐ 3/8" fiber free closed cell foam insulation (NFPA255, UL181)
  ☐ No insulation
- 90° inlet damper with leak resistant perimeter seal limiting leakage to <1% of max rated flow at 3" w.g. inlet static pressure. (Size 24x16 is Nominal 60° rotation).
- Multi-Point center averaging Velocity Wing air flow sensor for accuracy to ± 5% of design flow. Flow taps for air flow measurement provided with factory mounted controls.
- Slip & drive cleat discharge connection.
- Choice of right hand or left hand control position.
- Optional Accessories:
  ☐ 6 x 6 access plate ☐ Bottom ☐ Side*
  ☐ 6 x 6 access door ☐ Bottom ☐ Side* ☐ Hinged ☐ Double Camlock
  ☐ Unit mounting brackets (field installed)
  ☐ Std. Control enclosure ☐ Screw attached cover ☐ Hinged front cover
  ☐ Large control enclosure ☐ Screw attached cover
- Control System ☐ Electronic Analog ☐ Digital ☐ Pneumatic ☐ Electric ☐ None – No controls
- Control Package ☐ Field Installed Controls

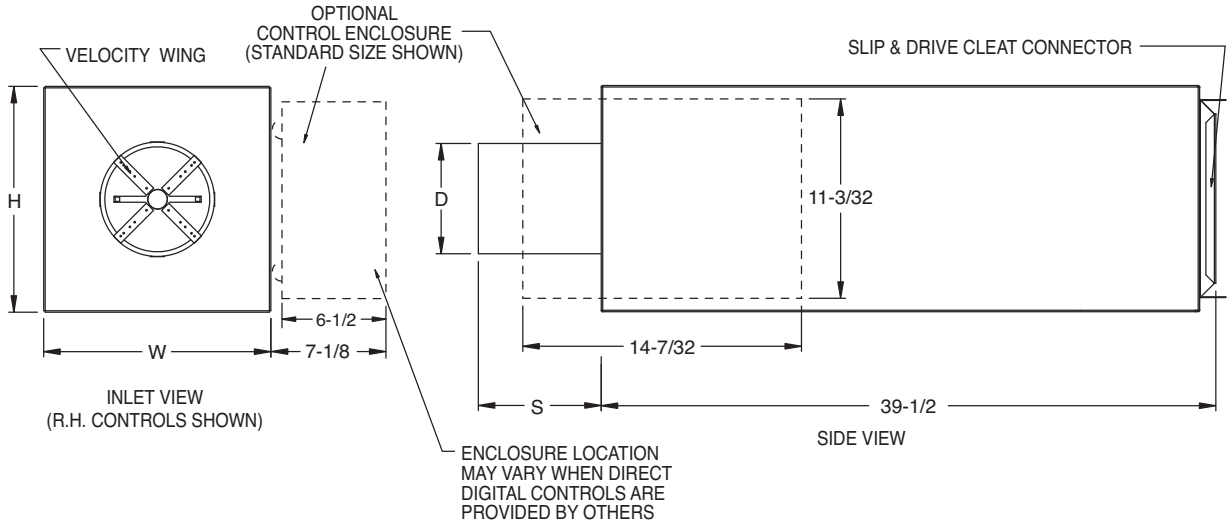

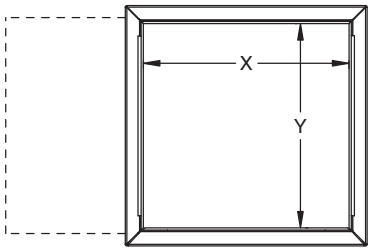

DISCHARGE VIEW

SIZE	D	W	H	X	Y	S	EST. WT.
05	4 7/8	10	10	8 3/4	8 3/4	5 3/8	20 LBS
06	5 7/8	10	10	8 3/4	8 3/4	5 3/8	20 LBS
07	6 7/8	12	10	10 3/4	8 3/4	5 3/8	22 LBS
08	7 7/8	12	10	10 3/4	8 3/4	5 3/8	22 LBS
09	8 7/8	14	12 1/2	12 3/4	11 1/4	5 3/8	28 LBS
10	9 7/8	14	12 1/2	12 3/4	11 1/4	5 3/8	28 LBS
12	11 7/8	16	15	14 3/4	13 3/4	5 3/8	32 LBS
14	13 7/8	20	17 1/2	18 3/4	16 1/4	5 3/8	39 LBS
16	15 7/8	24	17 1/2	22 3/4	16 1/4	5 3/8	44 LBS
24 x 16	24 x 16	38	18	38	18	5 7/16	109 LBS

NOTES:
- 24 X 16 NOT ILLUSTRATED.
- INLET SENSOR LINE TERMINATIONS ARE 3/8" O.D. WHEN CONTROLS ARE FIELD INSTALLED.

* SIDE ACCESS DOOR IS LOCATED ON THE SAME SIDE AS CONTROLS.

AHRI CERTIFIED® www.ahridirectory.org
VAV Terminals
AHRI Standard 880

All dimensions are in inches.

JOB NAME: **SUBMITTED BY:**

Product information is subject to change without notice.
Drawing is not to scale.

DWG# EZT-S-0007 Date 6-6-17
Rev K