




PRODUCT FEATURES

- AHRI 880 certified / ETL listed as applicable.
- Integral sound attenuator reduces discharge sound levels.
- 22 gauge zinc-coated steel, low leakage casing construction sealed to limit leakage to <1% of max rated flow at 3" w.g. static pressure.
- Optional:
 - 20 gauge construction Ultra Lo-Leak construction
- 1/2" dual density insulation (NFPA 90A, UL 181).
- Optional:
 - 1" dual density glass fiber insulation
 - 1/2" 1" foil faced glass fiber insulation
 - metal taped edges (ASTM C665)
 - 1" Fibre-Lok insulating system – foil faced insulation with steel encapsulated edges (ASTM C665)
 - Double wall construction (1/2" insulation is standard)
 - Lo-Temp casing construction
 - 3/8" fiber free closed cell foam insulation (NFPA255, UL181)
 - No insulation
- 90° inlet damper with leak resistant perimeter seal limiting leakage to <1% of max rated flow at 3" w.g. inlet static pressure. (Size 24x16 is Nominal 60° rotation).
- Multi-Point center averaging Velocity Wing air flow sensor for accuracy to ± 5% of design flow. Flow taps for air flow measurement provided with factory mounted controls.
- Slip & drive cleat discharge connection.
- 1, 2, or 4 row hot water coils with 1/2" o.d. copper tubes thru aluminum corrugated fins @ 10 per inch.
- Choice of right hand or left hand control and hot water coil connections.
- Optional Accessories:
 - 6 x 6 access plate Bottom Side*
 - 6 x 6 access door Bottom Side* Hinged Double Camlock
 - Unit mounting brackets (field installed)
 - Std. Control enclosure Screw attached cover Hinged front cover
 - Large control enclosure Screw attached cover
- Control System Electronic Analog Digital Pneumatic Electric
 - None – No controls
- Control Package _____ Field Installed Controls

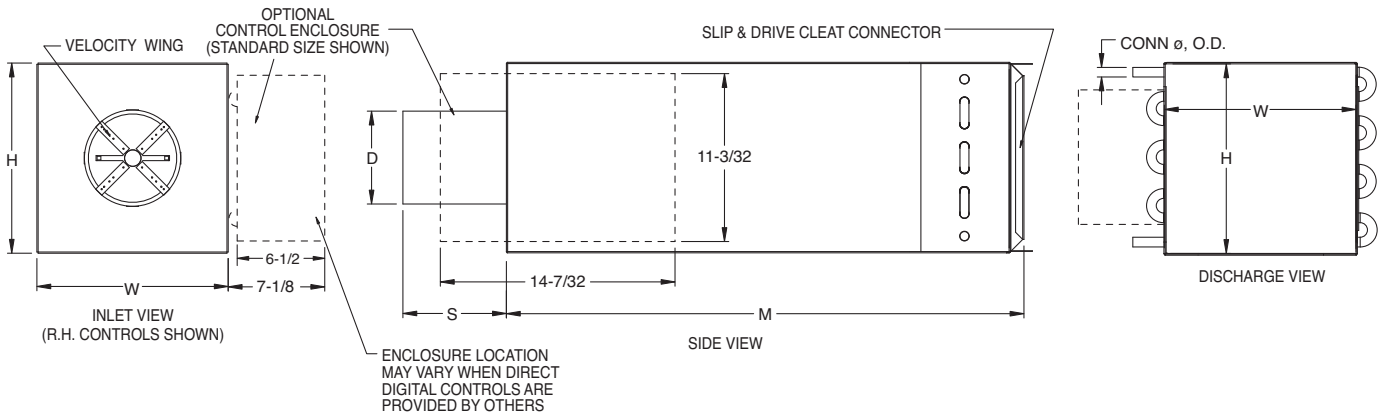

SIZE	D	W	H	1 ROW			2 ROW			4 ROW			S
				M	WGHT	CONN ϕ	M	WGHT	CONN ϕ	M	WGHT	CONN ϕ	
05	4 7/8	10	10	43 1/4	25 LBS	1/2	44 5/16	27 LBS	1/2	46 7/16	32 LBS	7/8	5 3/8
06	5 7/8	10	10	43 1/4	25 LBS	1/2	44 5/16	27 LBS	1/2	46 7/16	32 LBS	7/8	5 3/8
07	6 7/8	12	10	43 1/4	28 LBS	1/2	44 5/16	31 LBS	1/2	46 7/16	36 LBS	7/8	5 3/8
08	7 7/8	12	10	43 1/4	28 LBS	1/2	44 5/16	31 LBS	1/2	46 7/16	36 LBS	7/8	5 3/8
09	8 7/8	14	12 1/2	43 1/4	35 LBS	1/2	44 5/16	39 LBS	1/2	46 7/16	47 LBS	7/8	5 3/8
10	9 7/8	14	12 1/2	43 1/4	35 LBS	1/2	44 5/16	39 LBS	1/2	46 7/16	47 LBS	7/8	5 3/8
12	11 7/8	16	15	43 1/4	41 LBS	7/8	44 5/16	47 LBS	1/2	46 7/16	56 LBS	7/8	5 3/8
14	13 7/8	20	17 1/2	43 1/4	51 LBS	7/8	44 5/16	59 LBS	7/8	46 7/16	73 LBS	7/8	5 3/8
16	15 7/8	24	17 1/2	43 1/4	58 LBS	7/8	44 5/16	66 LBS	7/8	46 7/16	82 LBS	7/8	5 3/8
24 x 16	24 x 16	38	18	43 1/4	131 LBS	7/8	44 5/16	142 LBS	7/8	46 7/16	165 LBS	1 1/8	5 7/16

NOTES:

- 24 X 16 NOT ILLUSTRATED.
- INLET SENSOR LINE TERMINATIONS ARE 3/8" O.D. WHEN CONTROLS ARE FIELD INSTALLED.
- WET WEIGHTS SHOWN

* SIDE ACCESS DOOR IS LOCATED ON THE SAME SIDE AS CONTROLS.

All dimensions are in inches.

JOB NAME:

SUBMITTED BY: